



Turfcare & Spraying Equipment

Mention this Flyer & Receive a 5% Discount on Your First Order!

OMAHA, NEBRASKA
13808 IND. ROAD
1-800-228-9666

DAVENPORT, IOWA
601 W. 76th ST.
1-800-553-6975

E-Mail: dultmeier@dultmeier.com
Website: http://www.dultmeier.com

Limited Quantities Available
On Some Items

Turf Eq.
12/03



Our 400 Page Catalog has thousands of products for your Turfcare & Spraying Equipment Needs!

Call Toll-Free or E-Mail Us For Your **FREE** Copy of Our 2004 Catalog!


Omaha NE: 1-800-228-9666 or Davenport, IA 1-800-553-6975

We Have Over 14,000 Different Items and Over 1,400,000 Total Items In Stock! Thousands of Spraying Components & Parts!

"Space Saver" Skid Mounted Sprayers 50 & 100 Gallon Models

Standard Features Include:

- These compact units fit in front end of pickup bed between cab & wheel wells - 2/3 of your bed remains open!
- Hose reel positioned for convenient access from right side of bed.
- Heavy-duty welded skid frames with **extra-tough powder coat paint finish**.
- Honda engines (Other engines available).
- Hypro roller or diaphragm pumps (see below).
- Hannay hose reels with 300' of 1/2" 600 PSI chemical hose & spray gun.
- Units include engine pump, strainer, valves, agitation, pressure regulator, and lawn spray gun.
- Can be customized with any pump unit fitting on a 12" x 30" baseplate.

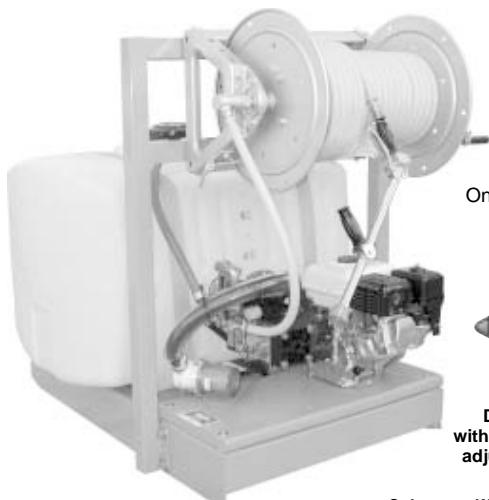

Only 3'9" Long x
32" Wide




DU 1A008
with optional 17"
adjustable gun

Part No.	Gal.	Std. Pump	Hose Reel	Wt. Lbs.	Net Ea.
DU 1A004	50	7560NR Roller, 5.5 HP Honda.....	*Manual/Crank	350	\$ 2085.00
DU 1A003B	100	7560NR Roller, 5.5 HP Honda.....	*Manual/Crank	360	2175.00
DU 1A008	100	D403 Diaphragm, 5.5 HP Honda.....	*Manual/Crank	360	2455.00
DU 1A003	100	D403 Diaphragm, 5.5 HP Honda.....	12 Volt Electric	400	2762.00

*Add \$310.00 for Electric Hose Reel. Add \$205.00 for Hose Roller Assembly & bottom mount bracket (DU HRA1).

200 & 300 Gallon Skid Sprayers

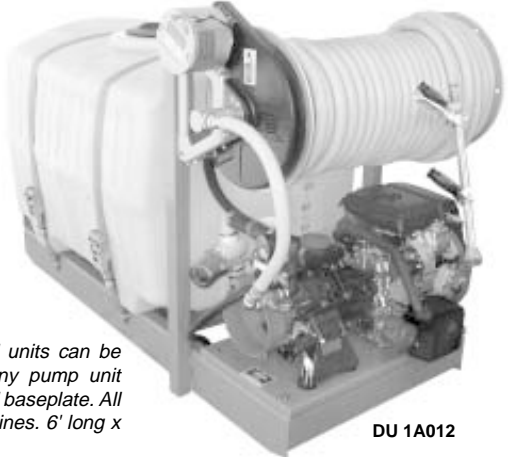

NOTE: These skid units can be customized with any pump unit fitting on a 12" x 30" baseplate. All include Honda Engines. 6' long x 3'4" wide.

Part No.	Gal.	Std. Pump	HP	Wt.	Net Ea.
DU 1A021	200	7560XLR Roller	5	400	\$ 2635.00
DU 1A000	200	D30 Diaphragm	5.5	400	2865.00
DU 1A001	200	D503 Diaphragm	8	425	3350.00
DU 1A012	200	D904 Diaphragm	18	600	4730.00
DU SM300-AR30	300	D403 Diaphragm	5	425	2730.00

Part No.	Std. Pump	Gallon	Wt.	Net Ea.
DU SM300-5076	7560XLR Roller	300	425	\$ 2730.00

500 Gallon Skid Sprayers



Shown Above with
Optional Hose Reel & Frame

500 Gallon Skid Mount Spraying Units are ideal for a wide variety of applications such as weed/turf spraying, tree spraying, mobile cleaning, fire control, etc. These skid units can be customized with any pump unit fitting on a 18" x 30" baseplate. **Note:** Hose reels and hose are optional and will differ depending on the application (See Bottom). 8' Long x 3'4" Wide.

500 GALLON UNITS

Part No.	Std. Pump	Tank Gal.	Wt.	Net Ea.
DU SM500-3C5	6500 Roller; Briggs	500	450	\$ 2115.00
DU SM500-5076	7560XLR Roller; Honda	500	450	2435.00
DU SM500-AR30	D30 Diaphragm; Briggs	500	450	2500.00
DU SM500-AR50	D503 Diaphragm; Briggs	500	450	2850.00

Part No.	OPTIONAL ITEMS	Net Ea.
DU 1526HR	Manual Hose Reel & Special Frame As Add On.....	\$ 375.00
TF A1661-1/2	Chemical Hose for Turf & Ag Spraying (Per Foot)98

—Other Options also Available—



Turfcare & Spraying Equipment

"Professional" Series Backpack Sprayers



The Professional Series is designed for the professional and features the utmost in performance, comfort and safety. Recommended for lawncare, golf course maintenance, forestry, custom application, pest control, arborists and many other uses. Blow molded tanks are ergonomically designed for comfort. Routine cleaning & maintenance can be done without tools!

SPO includes jet agitation for wettable powders & micro-encapsulated products.

SP1 is multi-purpose model; can also spray paints & other viscous products.

SP2 includes completely sealed "no leak" piston pump; also safe for chlorine-based products. *Do not use with wettable powders.*



Part #	Capacity	Max. Pressure	Pump Type	Empty Wt.	Net Ea.
SX SPO	4 Gal.	150 PSI	Sealed Piston/Diaph.	10 lbs.	\$ 137.00
SX SP1	4 Gal.	70 PSI	Sealed Diaphragm	10 lbs.	129.00
SX SP2	4 Gal.	180 PSI	Sealed Piston	10 lbs.	129.00

Other Models Also Available.

NORWESCO Rectangular Tanks



Rotationally Molded Polyethylene • Yellow Color

- No Saddles required
- 5" Fillwell & vertical cover on 30 thru 100 Gallon, 10" Fillwell & splashguard on 150 & 200 gallon tanks.
- 16" Fillwell & Stainless Baffle standard on 300 Gal. Tank
- Flat area on each end for fittings or agitation
- Attractive compact design requiring no complex saddling or support structures.
- Molded in gallonage indicators on end and sidewall.
- Ribbed for extra strength with U-V inhibitors added for protection against sunlight.
- Ideal for lawn care, turf and pest control uses.

Part No.	Capacity	Width	Height	Length	Net Ea.
RV 47022	30 Gal.	19"	20"	25"	\$ 57.00
RV 47013	50 Gal.	19"	20"	38"	68.05
RV 47020	100 Gal.	30"	26"	38"	101.50
RV 47350	150 Gal.	36"	26"	48"	119.00
RV 47352	200 Gal.	36"	35"	48"	148.00
RV 47359	300 Gal.	36"	35"	69"	366.50

We Carry a Complete Line of Tanks!

Shurflo Propack™ Rechargeable 12V Electric Backpack Sprayer

Eliminates the need to manually pump up the sprayer to maintain pressures and spray patterns. The Propack sprays up to 120 gallons on a single charge. Micro-processor control with 4 pump speeds and easy-to-reach, one touch master control. Adjustable brass nozzle provides for high volume cone, long-range solid stream or delicate mist spraying. Chemical resistant Shurflo pump is "on-demand"-simply depress wand lever to start spraying & release to stop. Ergonomically designed 4 gal. tank, full breathable pad pack, thick shoulder pads & waist belt for maximum comfort. Battery pack removes easily or can be charged in place; status lamp indicates "power on" & blinks when time to recharge. 24" wand with heavy-duty lockable hand lever to reduce fatigue on big jobs.



Part No.	Net Ea.
SU SRS540 12 Volt Electric Backpack Sprayer	\$ 156.00

Spot Sprayer Tanks

These 15 & 25 gallon polyethylene tanks have been designed specifically for use on spot sprayers.

FEATURES: • flat pump mounting surface on top with four 1/4-20 threaded inserts • six 5/16-18 inserts on the bottom surface for tank mounting • molded in gallonage indicator • Ribbed for extra strength with UV inhibitors added for protection against sunlight • 5" threaded FW and cover with ball check standard • molded in recesses for strap mounting • Ends have recessed area to accommodate wrapping of hose and spray gun • Standard color is yellow. **Outlet fittings are not included.**



Part No.	Gallons	Height	Base Width	O.A. Width	Length	Net Ea.
RV 10958	15	15"	11"	14"	30"	\$ 26.60
RV 10957	25	20"	14"	18"	30"	32.20



Hose Reel & Mounting Kit For 15 & 25 Gallon Sprayers



Hose Reel Kit for 15 & 25 Gallon Sprayers. Mount this reel to 15 or 25 gallon spot sprayers shown on this page. Make it easier to reach those hard to reach places with the 50' hose, then wind up the hose when done. Kit comes with manual reel, mounting bracket, 50' of 3/8" EPDM hose and adjustable hand wand with extension.

Model SPHR Hose Reel & Mounting Kit Only (Sprayer Sold Separately)

Part No.	Description	Net Ea.
DS SPHR	Reel, Mounting Bracket, Spray Gun & Hose	\$ 165.00

15 Gallon



Spot Sprayers

For unlimited uses such as lawn and garden, trees, shrubs and ornamentals. Available with 15 or 25 gallon premium poly tanks with threaded fasteners molded in bottom side of tank.

Features: 3-Year tank warranty • 5" Screw on fill cap with vent • 15 feet of 3/8" coiled spray hose • Spray wand with fully adjustable spray tip.

Models SP14 & SP25 feature ShurFlo 12-volt Pumps (1.8 GPM) with adjustable demand switch, pressure cut out 60 PSI, cut in 45 PSI. Maximum amp draw is 7.3.

Model AR25 uses a ShurFlo Pump rated at 3 GPM. Has a nylon throttling valve to regulate pressure and help keep pump from cycling on and off. Maximum amp draw is 9.6.



25 Gallon

Part No.	Gal.	Power	Pump	GPM	Net Ea.
DU SP14	15	12-Volt DC	Diaphragm	1.8	\$ 103.00
DU SP25	25	12-Volt DC	Diaphragm	1.8	113.00
DU AR25	25	12-Volt DC	Diaphragm	3.0	162.50
DS BK2	41"	ATV Boom, 84" Coverage		94.30




Turfcare & Spraying Equipment

Thermoplastic Pump Units

1-1/2", 2", & 3" • Corrosion Resistant
3 H.P. thru 10 H.P. • Self-Priming Centrifugals

Use of tough engineering thermoplastic makes these excellent pumps for transfer of corrosive products. The pump housings are made of thermoplastic polyester which is noted for its outstanding chemical resistance. The pump elastomers are EPDM. Carbon-Ceramic EPDM mechanical seals. Stainless shafts. TEFC motors & powder coated steel base plates. Flow rates from 120-280 GPM.

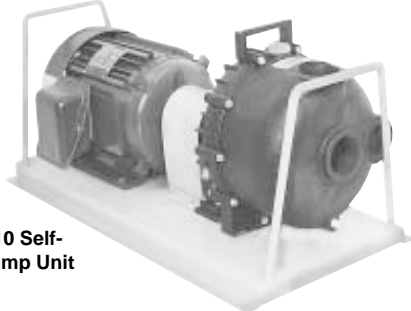


DU PR5010 Self-Priming Pump Unit

Pump No.	Max GPM	GPM @ 20 PSI	Ports	HP	Motor Phase	Net Ea.
DU PR2010	125	50	2"	2	1	\$ 571.00
DU PR2030	125	50	2"	2	3	498.50
DU PR3010	180	130	2"	3	1	630.00
DU PR3030	180	130	2"	3	3	575.00
DU PR5010	180	130	2"	5	1	731.00
* DU PR5010A	250	180	2"	5	1	774.00
DU PR5030	180	130	2"	5	3	633.00
* DU PR5030A	250	180	2"	5	3	669.00
DU PR7510	280	210	3"	7.5	1	991.00
DU PR7530	280	210	3"	7.5	3	773.00

* High flow 2" models.

Diaphragm Pumps

D50 Features:

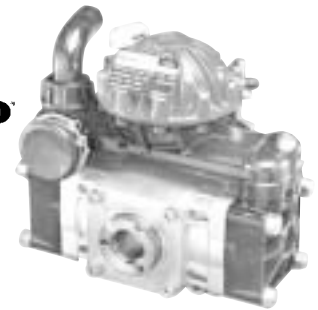

- Max. flow: 14 gpm
- Max. pressure: 580 psi
- Max. rated speed: 550 rpm
- Max. fluid temp.: 140° F
- Shaft: D50 flanged for shaft kit; D50AP-A flanged w/1" shaft ext.
- Port sizes: 1-1/4" inlet, 1/2" outlet, hose barb
- Diaphragms: 2, full-hydraulic
- Housing: epoxy-coated liquid handling components
- Pump shaft rotation: CW and CCW
- For direct gas engine mount, use gear reduction Kit 1642

D50 Performance Chart

PSI	350 RPM		450 RPM		550 RPM	
	GPM	HP	GPM	HP	GPM	HP
50	9.5	.6	11.9	1	14	1.5
100	9.3	1	11.7	1.6	13.8	2
200	9.1	1.6	11.5	2.3	13.6	3
300	9	2	11.4	2.8	13.5	3.5
400	8.7	2.7	11	3.5	13.2	4.5
550	8.45	3.5	10.8	4.5	12.7	6.5

Part No.	Max. GPM	Max. PSI	Max. RPM		Net Ea.
HY 9910-D30	9.5	580	550	Pump Only, Double Diaphragm	\$ 336.00
HY 9910-D30AP-A	9.5	580	550	With Solid extended shaft	378.00
HY 9910-D50	14.0	580	550	Pump Only, Double Diaphragm	476.50
HY 9910-D50AP-A	14.0	580	550	With Solid extended shaft	499.00
HY 9910-D403	10.6	580	550	Pump Only, Triple Diaphragm ..	347.00
HY 9910-D503	14.0	580	550	Pump Only, Triple Diaphragm ..	476.50

— Other Models Available —

High Pressure Spray Hose

Chemical Resistant

Cover: Bright Yellow PVC
Tube: PVC/Polyurethane Blend



A bright yellow hose for commercial spraying. Works great on hose reels. Has ribbed yellow PVC cover with PVC/Polyurethane blend tube for excellent chemical resistance including aromatic hydrocarbon based products. Abrasion resistant.

Specifications: Pinpricked cover to vent vapor and prevent ballooning • Temperature range is +15°F. to +160°F. Standard coil size is 300', but is available in 400'. Use Bandit Connections. **Note:** Hydraulic or reusable type fittings are not recommended.

Part No.	PSI @ 70° F	Wt.	Net Ea.	
TF A1661-06	3/8" x 300' Coil	600	41	\$ 168.70
TF A1661-08	1/2" x 300' Coil	600	57	222.85

— Many Other Hoses Available —



ROLLER PUMPS

6500C
Hypro

Other Models Available!

Part No.	Type of Pump	Max. GPM	Net Ea.
HY 4101C	Cast Iron	7.2	\$ 68.55
HY 4001N	Ni-Resist	9.1	117.50
HY 6500C	Cast Iron	21.9	74.70
HY 6500N	Ni-Resist	21.9	153.50
HY 7560C	Cast Iron	22.0	99.00
HY 7560N	Ni-Resist	22.0	153.95

SHURflo DIAPHRAGM PUMPS




#4111-035

with manifold connections

ShurFlo Pumps for a wide variety of low pressure applications. Pumps are available in 12/115V with EPDM, Viton or Santoprene internals. Diaphragms are Santoprene. Adjustable demand switch for automatic shut-off or internal by-pass without a switch are available. Self-priming. **Maximum liquid temperature is 170° F.** **NOTE:** Pumps are not warranted for chemical compatibility. Check your requirements carefully and call with any questions. **Many more ShurFlo Pumps are readily available.**

Part No.	Volts	Max. GPM	Control	Cut out Press.	Cut In Press.	Ports	Materials Valves	Net Ea.
SU 4111-035	12-DC	7.0	Adj. Demand Switch	45	30	1/2" MPT	Viton	\$ 170.10
SU 8000-543-236	12-DC	1.4	Adj. Demand Switch	60	45	3/8" FPT	Viton	51.50
SU 8000-543-250	12-DC	1.3	Internal By-Pass	45	NA	3/8" FPT	Viton	49.95
SU 2088-343-135	12-DC	2.9	Adj. Demand Switch	50	25	1/2" MPT	Viton	71.95
SU 2088-313-145	12-DC	3.6	Adj. Demand Switch	45	25	1/2" MPT	Viton	124.50
SU 2088-514-144	12-DC	4.0	Adj. Demand Switch	45	25	1/2" MPT	Santo	111.50
SU 8000-533-236	115-AC	1.4	Adj. Demand Switch	60	45	3/8" FPT	Viton	86.60
SU 2088-594-154	115-AC	3.3	Adj. Demand Switch	50	25	1/2" MPT	Santo	86.15

Lawn Spray Guns

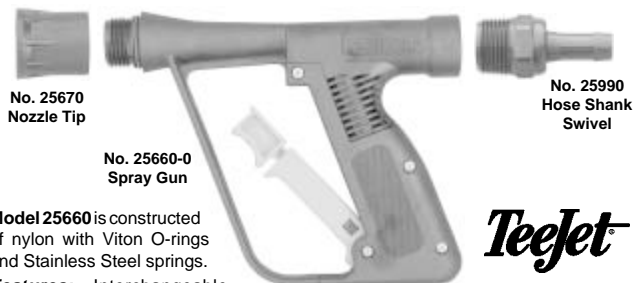

No. 25670
Nozzle Tip

No. 25990
Hose Shank Swivel

No. 25660-0
Spray Gun

Model 25660 is constructed of nylon with Viton O-rings and Stainless Steel springs.

Features: Interchangeable nozzle tips that are color coded for easy identification of tip size • "Showerhead" spray pattern • Convenient trigger lock for continuous spraying • Maximum operating pressure of 200 PSI.

Part No.	Color	GPM @ 20 PSI	Net Ea.
SS 25660-0	Spray Gun Only	-	\$ 34.60
SS 25670-1.5NY	Nozzle Tip	Gray 4.0	5.54
SS 25670-3.0NY	Nozzle Tip	Black 5.6	5.54
SS 25670-4.0NY	Nozzle Tip	Red 6.4	5.54
SS 25990	Hose Shank Swivel		5.08

— Many Other Spray Guns Available —



Turfcare & Spraying Equipment



1526-17-18

HOSE REELS

High quality Hannay Hose Reels in Hand Crank or 12 Volt DC Rewind. Ideal for turf care, tree spraying, etc. Reels will handle most liquid products to temperatures of +225°F and pressures to 3000 PSI. **Model PW2** is rated to 4000 PSI.

Part No.	HOSE SIZE I.D.	FOR HOSE REWIND	WT. Lbs.	Net Ea.
HN 1014-14-16	1/4" & 3/8"	Hand Crank	27	\$ 185.00
HN 1020-14-16	1/4" & 3/8"	Hand Crank	31	185.00
HN 1520-17-18	3/8" & 1/2"	Hand Crank	34	225.00
HN E1520-17-18	3/8" & 1/2"	12-Volt DC	59	535.00
HN 1526-17-18	3/8" & 1/2"	Hand Crank	38	225.00
HN E1526-17-18	3/8" & 1/2"	12-Volt DC	63	535.00
HN 4028-17-18	1/2", 3/4" & 1"	Hand Crank	54	305.00
HN E4028-17-18	1/2", 3/4" & 1"	12-Volt DC	88	615.00
HN PW2	3/8"	Hand Crank	30	190.00



Polyethylene Storage & Transport Tanks



Ace Roto-Mold

FEATURES:

- High quality polyethylene with UV protection
- Molded-in deep tie-down lugs
- 16" vented lids (22" available)
- Molded-in gallonage markers
- 3 year warranty
- 14Lbs./Gal. rating (16Lbs./Gal. available)
- Maximum Temperature is 140° F
- Polypropylene bulkhead fittings. (S.S. available).

Many Sizes & Models Available — Call for Pricing!

Disposable Safety Wear

Model 1015XL "TYVEK" Coverall provides an excellent barrier to many dry particulates at an economical price. Features a full cut with full length front zipper. **Color:** White.

Model 1058XL "TYVEK QC" Coverall is a polyethylene-coated garment offering excellent splash protection against pesticides and many other chemicals. This coverall features an attached hood, full length front zipper, along with elastic wrists and ankles. **Color:** Yellow.

Model 4015XL is "Tyvek" laminated with Saranex® polymers to give the ultimate in chemical protection. This garment has a full cut along with full length front zipper. **Color:** White.

Model 905LXL Shoe & Boot Covers are constructed of a "TYVEK" upper body with a vinyl sole and elastic ankle.



Part No.	Size	Net Ea.
* WL 1015XL "TYVEK" Coverall	XL	\$ 6.15
* WL 1058XL "TYVEK QC" Coverall	XL	10.20
** WL 4015XL "TYVEK" Saranex® Coverall ..	XL	17.10
† WL 905LXL Shoe & Boot Covers (TYVEK)	L-XL	3.03

* Less 25% on Std. Pkg. of 25. ** Less 25% on Std. Pkg. of 12
† Less 25% on Std. Pkg. of 200.

Gloves for Chemical Handling



7712R



N-DEX Disposable
4-Mil Nitrile Gloves

Part No.		LESS 10% Pkg. 12	LESS 20% on Carton
BS 7712R	BEST® PVC GLOVES 12" Lined	\$1.58	\$1.31 (Ctn 72)
BS 7714R	BEST® PVC GLOVES 14" Lined	1.72	1.43 (Ctn 72)
BS 737	UNLINED NITRILE GLOVES For Chemicals	5.59	4.65 (Ctn 72)
BS 727-11	Light Duty UNLINED	1.40	1.16 (Ctn 144)
BS 55-10	Heavy Duty RUBBER	6.18	5.15 (Ctn 36)
*BS 7005XL	N-DEX Disposable Nitrile Gloves	N/A	8.66 (Ctn 20)

* Box of 100 Gloves

PROTECTIVE GOGGLES



551

Goggles have a clear frame and stack-trap vent. The ultimate in wearer comfort, safety and efficiency. Deep, well proportioned frame fits easily and comfortably over prescription glasses.

Clarity of frame permits wide vision. Angle of lens in frame provides ideal working vision. Elastic headbands standard. This goggle has indirect ventilation with exclusive, splash-proof, non-corrosive, plastic, stack-trap vents in place of perforations for acid and splash conditions. *Complies with OSHA Standards (ANSI Z87.1, 6.1.3 Model).*

Part No.		Net Each
WL 551	Vented Goggle	\$ 2.90 ea.
WL 552	Unvented Fogless Goggle	\$ 3.57 ea.

– Less 20% On Case of 72 –

Moldex Resposable™ Respirators



The **Moldex 8000 Resposable™** is a low maintenance reusable that's affordable and disposable. Comes pre-assembled with cartridges.

The low-profile design provides one of the largest fields of vision available. The facepiece conforms easily to facial contours and provides a comfortable fit because it's made of a soft, flexible-yet-tough thermoplastic material.

Part No.		Net Ea.
WL 8112	Pesticide & Paint Spray Respirator - Complete	\$ 21.15

Now View Our Catalog On The Internet ! Visit Us Now at dultmeier.com



You Can Order From Our Entire Inventory On-Line !

Our Website Features:

Current Pricing • Order Status • Parts Schematics • Web Specials • Current Flyers/Specials • Closeout Items